

# M Series

## Half-inch Rotary Switches



### Agency Approvals

Agency	Agency File Number
UL US	E42363

**Notes:** Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

### Specifications

<b>Contact Rating</b>	Q contact material: Carry-6 amps continuous. Switch-250 mA max. @ 125 V AC or 28 DC. Non-shorting contacts standard. See page 5 for additional ratings.
<b>Electric Life</b>	10,000 make-and-break cycles at 150 mA, 125 V AC or 28 DC.
<b>Contact Resistance</b>	Below 20 mΩ typ. initial @ 2-4 V DC, 100 mA, for both silver and gold plated contacts.
<b>Insulation Resistance</b>	10 <sup>10</sup> Ω min.
<b>Dielectric Strength</b>	600 Vrms min. @ sea level.
<b>Operating &amp; Storage Temperature</b>	-30°C to 85°C
<b>Operating Torque</b>	4-7 ounces-inches typ. initial
<b>Solderability</b>	Per MIL-STD-202F method 208D, or EIA RS-186E method 9 (1 hour steam aging).

### Description

The M series half-inch rotary switch is available with multi-pole and multi-positions. With a stainless-steel actuator, non-shorting contacts, panel and PCB mounting and optional IP67 compliance, the M series is used most often in test, industrial and medical equipment.

### Features & Benefits

- Multi-pole and multi-positions
- Panel and PCB mounting
- Stainless steel actuator
- Non-shorting contacts
- RoHS Compliant
- IP67 (F option only)

### Applications

- Test equipment
- Industrial equipment
- Medical equipment

### Materials

<b>Housing &amp; Bushing</b>	Zinc alloy, bright zinc plated, with clear chromate finish.
<b>Actuator</b>	Zinc alloy, nickel plated or stainless steel.
<b>Base</b>	Diallylphthalate (DAP) or melamine phenolic, with insert molded terminal.
<b>Rotor</b>	Glass filled polyester (UL 94V-0).
<b>Movable Contacts</b>	Non-shorting: Q contact material: Copper alloy, silver plated. See page 5 for additional contact materials.
<b>Stationary Contact &amp; All Terminals</b>	Q contact material: Copper alloy, silver plated. All terminals insert molded. All terminals present regardless of number of switch positions. See page 5 for additional contact materials.
<b>Contact Spring</b>	Music wire, phosphate coated.
<b>Stop Pin</b>	Stainless steel
<b>Stop Ring</b>	Brass.
<b>Hardware</b>	Nut: Brass, nickel plated; Lockwasher: Steel, nickel plated.

# M Series

## Half-inch Rotary Switches



### Ordering Number

To order, simply select desired option from each category and place in the appropriate box. For additional options not shown in catalog, consult Customer Service Center.

**Mxxx - xx - N - x - x - x**

#### Switch Function

- MA00:** SP, 10 pos., 36°
- MA02:** SP, 2 pos., 36°
- MA03:** SP, 3 pos., 36°
- MA04:** SP, 4 pos., 36°
- MA05:** SP, 5 pos., 36°
- MA06:** SP, 6 pos., 36°
- MA10:** SP, 10 pos., 36°
- MB00:** DP, 5 pos., 36°
- MB03:** DP, 3 pos., 36°
- MB04:** DP, 4 pos., 36°
- MB05:** DP, 5 pos., 36°
- MC00:** SP, 12 pos., 30°
- MC03:** SP, 3 pos., 30°
- MC07:** SP, 7 pos., 30°
- MC12:** SP, 12 pos., 30°
- MD00:** DP, 6 pos., 30°
- MD06:** DP, 6 pos., 30°
- ME00:** SP, 10 pos., 36°
- ME04:** SP, 4 pos., 36°
- MF00:** DP, 5 pos., 36°
- MG00:** SP, 12 pos., 30°
- MH00:** DP, 6 pos., 30°

#### Actuator & Bushing

- L1:** 0.650" long, flattened
- L2:** Screwdriver slot, flush
- L3:** 0.650" long, round
- S1:** 0.650" long, flattened
- S2:** Screwdriver slot, flush
- S3:** 0.650" long, round
- S6:** 0.785" long, slot

#### Seal

- D:** No seal
- F:** Splashproof shaft & panel seal (IP67)

#### Terminations

- Z:** Solder lug
- C:** PC Thru-hole

#### Contact Material

- Q:** Silver
- G:** Gold over silver

#### Short/Non-short

- N:** Non-shorting contacts

**Notes:** Please contact technical support for the switch function of DP version


36° Indexing			
No. Poles	Model No.	Model No. With Stop Rings	Switch Function
SP	MA00	ME00	10 Positions No Stops
	MA02	-	2 Positions
	MA03	-	3 Positions
	MA04	ME04	4 Positions
	MA05	-	5 Positions
	MA06	-	6 Positions
	MA10	-	10 Positions
DP	MB00	MF00	5 Positions No Stops
	MB03	-	3 Positions
	MB04	-	4 Positions
	MB05	-	5 Positions

30° Indexing			
No. Poles	Model No.	Model No. With Stop Rings	Switch Function
SP	MC00	MG00	12 Positions No Stops
	MC03	-	3 Positions
	MC07	-	7 Positions
	MC12	-	12 Positions
DP	MD00	MH00	6 Positions No Stops
	MD06	-	6 Positions


**Notes:** All models with all options when ordered with S1-S6 stainless steel actuator options. Number of positions or stops preset at factory (MX00 models have full 360 rotation with no stops. Stop pins or stop rings supplied for user-selectable stops, see above). All terminals present regardless of number of switch positions. Hardware is available separately, see section "Technical Data and Additional Hardware".

### Switch Function


#### SP Models 36° Indexing Schematic




#### DP Models 36° Indexing Schematic



#### SP Models 30° Indexing Schematic




#### DP Models 30° Indexing Schematic




# M Series

## Half-inch Rotary Switches

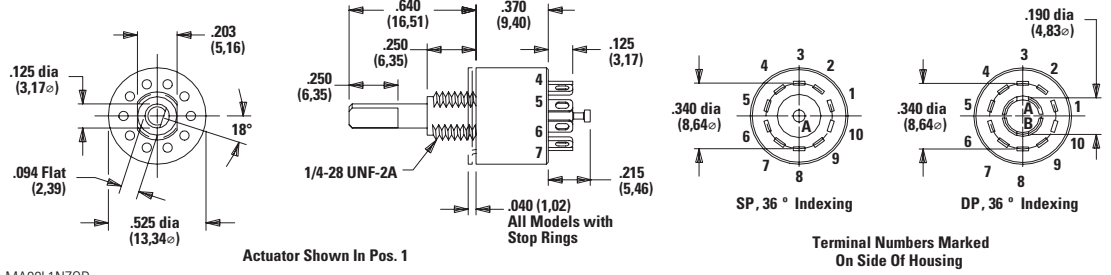


Part number shown: MA00L1NZ0D

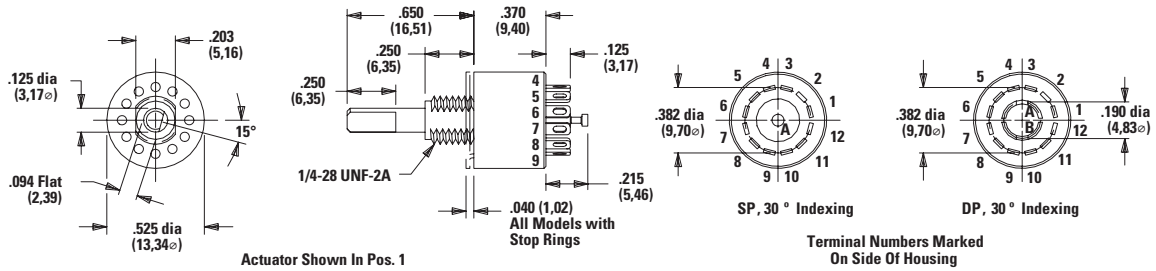


Part number shown: MC00L1NZ0D

### Actuator (Zinc Alloy)


#### L1 0.650" Long, Flatted

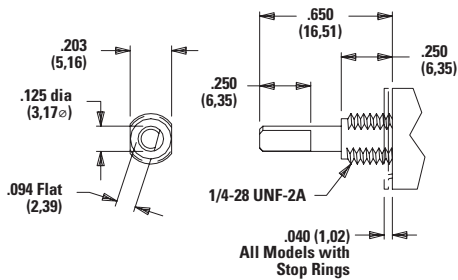

#### L2 Screwdriver Slot, Flush

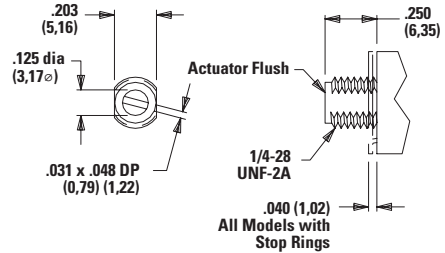

#### L3 0.650" Long, Round

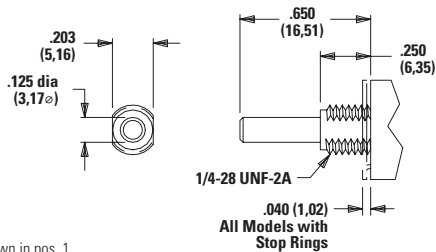

All actuators shown in pos. 1


# M Series

## Half-inch Rotary Switches




### Actuator (Stainless Steel)


**S1 0.650" Long, Flatted**

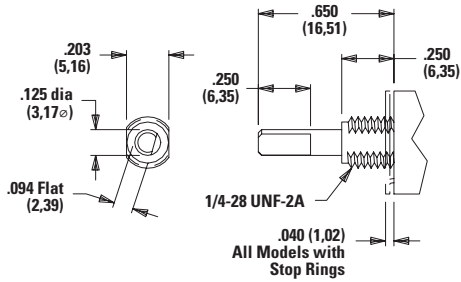


**S2 Screwdriver Slot, Flush**

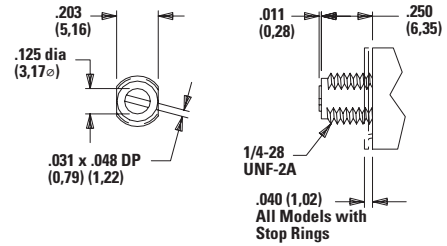

**S3 0.650" Long, Round**

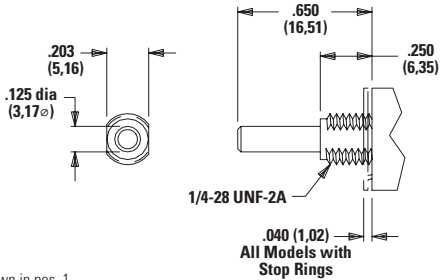

**S6 0.785" Long, Slot**

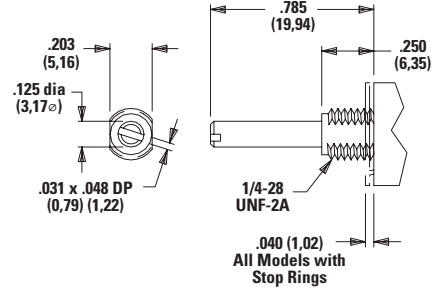

All actuators shown in pos. 1

All models **C** **RU** **US** when ordered with stainless steel actuators.


### Shorting/Non-Shorting Contacts

N Non-Shorting Contacts  
Break Before Make


### Terminations

**Z Solder Lug**

**SP**




**DP**




**C PC Thru-hole**

**SP**



**DP**




# M Series

## Half-inch Rotary Switches



### Panel Mounting

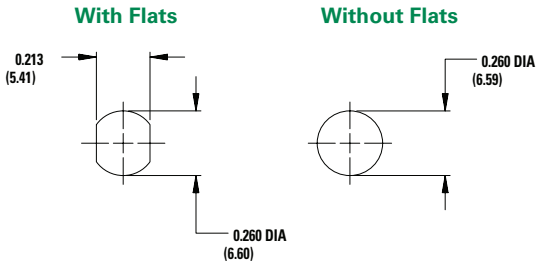


**Hardware:** All models, one mounting nut and lockwasher supplied standard. MA00 thru MD00 models: two stop pins and adhesive mylar washer supplied. ME00 thru MH00 models: two stop rings supplied. Hardware is available separately, see section "Technical Data and Additional Hardware".


Will withstand 12 in. - lbs of torque with no distortion.

**Notes:** Q contact material standard. Terminal numbers marked on side of housing. All terminals insert molded. All terminals present regardless of number of switch positions.

### PC Mounting 36° Indexing

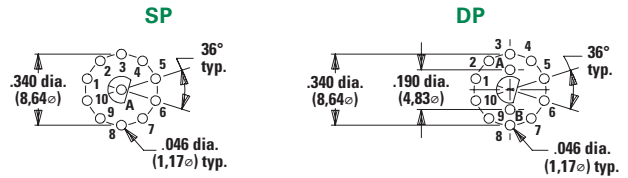

### PC Mounting 30° Indexing

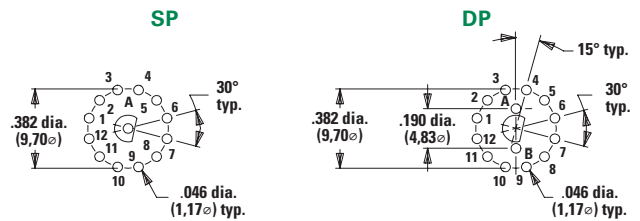

Actuators and schematics shown in pos. 1.

### Contact Material

Option Code	Contact Material	Terminal Plating	Rating
Q	Silver <sup>1,2</sup>	Silver <sup>2</sup>	Power Carry: 6 amps continuous. Switch: 250 mA @ 125 V AC or 28 V DC.
G	Gold over Silver <sup>3,4</sup>	Gold <sup>4</sup>	Low Level / Dry Circuit or Power 0.4 VA max. @ 20 V AC or DC max. Or, carry: 6 amps continuous. Switch: 250 mA @ 125 V AC or 28 V DC.

**Notes:** See Technical Data section of this catalog for RoHS compliant and compatible definition and specifications.

- Movable Contacts:** Non-shorting: Copper alloy, silver plated.
- Stationary Contacts & All Terminals:** Copper alloy, silver plated.
- Movable Contacts:** Non-shorting: Copper alloy, with gold plate over nickel plate, over silver plate.
- Stationary Contacts & All Terminals:** Copper alloy, with gold plate over nickel plate over silver plate.


Any models supplied with Q, G contact material are RoHS compliant. All models **CFRUS** when ordered with S1-S6 stainless steel actuator options.

# M Series

## Half-inch Rotary Switches




### Seal F Splashproof Shaft and Panel Seal IP67 approved

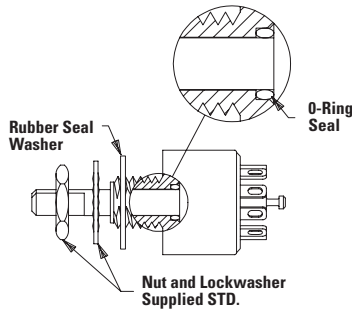

#### Setting Stops With Stop Pins MA00, MB00, MC00 & MD00 Models Only:


The number of switch positions or stops are adjustable by means of stop pins provided with each switch. Switches are normally shipped with stop pins and hardware in bulk, not installed. Without stop pins, switches have full 360° rotation and no stops. Note that all two pole models begin to repeat when actuated 180° or more. To set stops, refer to figures 1 & 2. Orient switch so that terminal no. 1 is as shown. Turn actuator to position 1, using flats on bushing and terminal no. 1 as reference. Install CCW stop pin in hole designated 'X'. Install second stop pin in hole number corresponding to the number of positions desired. Note that two pole models will begin to repeat when actuated 180° or more. To retain stop pins, use adhesive mylar washer included; see figure 3. All models except MX00 models have number of switch positions or stops pre-set at factory and are not adjustable.

**Hardware:** Two stop pins, mounting nut, and lockwasher supplied standard.

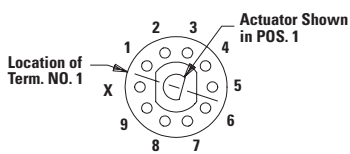

36° Indexing Models  
Top View

Fig. 1

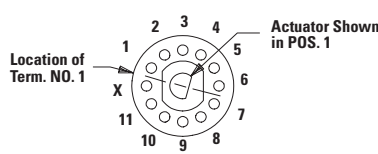

30° Indexing Models  
Top View

Fig. 2

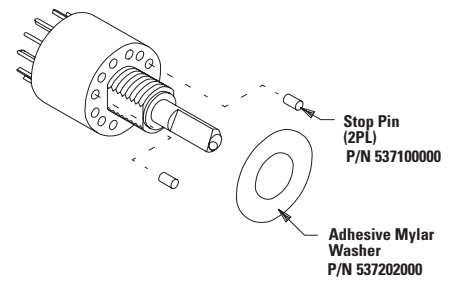


Fig. 3


#### Setting Stops With Stop Rings ME00, MF00, MG00 & MH00 Models Only:

The number of switch positions or stops are adjustable by means of stop rings provided with each switch. These models are normally shipped with stop rings and hardware in bulk, not installed. Without stop rings, switches have full 360° rotation and no stops. Note that all two pole models begin to repeat when actuated 180° or more. To set stops refer to figures 4 & 5. Orient switch so that terminal no. 1 is as shown. Turn actuator to pos. 1 using flats on bushing and terminal no. 1 as reference. See figure 6 and install inner stop ring with short tab in hole designated 'X'. Install outer stop ring with long tab in hole number corresponding to the number of positions desired. Note that all two pole models begin to repeat when actuated 180° or more. Use mounting nut and lockwasher to retain stop rings.

#### All MEXX, MFXX, MGXX & MHXX Models (Except MX00 models):


Number of switch positions or stops are preset at factory, but are user adjustable.

**Hardware:** Two stop rings, mounting nut and lockwasher supplied standard.

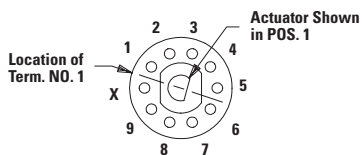

36° Indexing Models  
Top View

Fig. 4

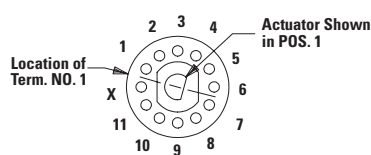

30° Indexing Models  
Top View

Fig. 5

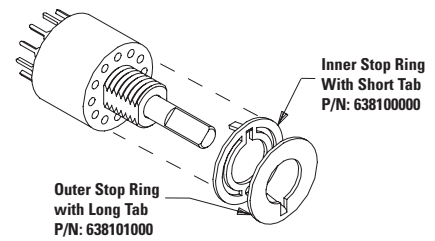


Fig. 6

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at <http://www.littelfuse.com/disclaimer-electronics>.